



A universal preconditioner for simulating condensed phase materials

D Packwood, JR Kermode, L Mones, N Bernstein,
J Woolley, NIM Gould, C Ortner, G Csányi

February 2016

Submitted for publication in The Journal of Chemical Physics

RAL Library
STFC Rutherford Appleton Laboratory
R61
Harwell Oxford
Didcot
OX11 0QX

Tel: +44(0)1235 445384
Fax: +44(0)1235 446403
email: libraryral@stfc.ac.uk

Science and Technology Facilities Council preprints are available online
at: <http://epubs.stfc.ac.uk>

ISSN 1361- 4762

Neither the Council nor the Laboratory accept any responsibility for loss or damage arising from the use of information contained in any of their reports or in any communication about their tests or investigations.

A universal preconditioner for simulating condensed phase materials¹

David Packwood², James Kermode³, Letif Mones⁴, Noam Bernstein⁵, John Woolley⁶,
Nicholas Gould⁷, Christoph Ortner² and Gábor Csányi⁴

ABSTRACT

We introduce a universal sparse preconditioner that accelerates geometry optimisation and saddle point search tasks that are common in the atomic scale simulation of materials. Our preconditioner is based on the neighbourhood structure and we demonstrate the gain in computational efficiency in a wide range of materials that include metals, insulators and molecular solids. The simple structure of the preconditioner means that the gains can be realised in practice not only when using expensive electronic structure models but also for fast empirical potentials. Even for relatively small systems of a few hundred atoms, we observe speedups of a factor of two or more, and the gain grows with system size. An open source Python implementation within the Atomic Simulation Environment is available, offering interfaces to a wide range of atomistic codes.

¹ This work was supported by the Engineering and Physical Sciences Research Council (EPSRC), under grant numbers EP/J022055/1, EP/L014742/1, EP/L027682/1, EP/J010847/1 and EP/J02-1377/1, and the Office of Naval Research through the Naval Research Laboratory's basic research program.

² Mathematics Institute, Zeeman Building, University of Warwick, Coventry CV4 7AL, UK.
. Email: christoph.ortner@warwick.ac.uk, d.packwood@warwick.ac.uk .

³ Warwick Centre for Predictive Modelling, School of Engineering, University of Warwick, Coventry CV4 7AL, UK. Email: j.r.kermode@warwick.ac.uk .

⁴ Engineering Laboratory, University of Cambridge, Trumpington Street, Cambridge, CB2 1PZ, UK.
Email: lam81@cam.ac.uk, gc121@cam.ac.uk .

⁵ Center for Materials Physics and Technology, Naval Research Laboratory, Washington DC 20375, USA.

⁶ Department of Physics, University of Warwick, Coventry CV4 7AL, UK

⁷ Scientific Computing Department, Rutherford Appleton Laboratory, Chilton, Oxfordshire, OX11 0QX, UK. Email: nick.gould@stfc.ac.uk .

Scientific Computing Department
Atlas Centre
Rutherford Appleton Laboratory
Oxfordshire OX11 0QX

February 4, 2016

1 Introduction

Geometry optimisation, i.e. finding a nearby local minimum of the potential energy surface is the most common routine task of atomistic modelling, not only used for finding the equilibrium geometries of molecules and crystals but also as a fundamental building block of more complex algorithms for global optimisation,[1] structure prediction by random search[2] and sampling.[3] The closely related task of finding saddle points is also used for finding transition states of reactions, global optimisation, and accelerated sampling.

It is well recognised in the optimisation community how important preconditioners are in creating efficient algorithms. An example familiar in the electronic structure community is using the kinetic energy operator as a preconditioner when solving the electronic energy minimisation problem in plane wave pseudopotential density functional theory (DFT) codes.[4] Preconditioning in linear algebra and numerical PDE problems is well established, but “universal” preconditioners do not work particularly well, and most practitioners advocate constructing preconditioners specifically designed to suit each problem.[5] There is a middle ground, which is to reduce the domain enough to be able to give a good preconditioner, but keep it general enough that many problems that need solving fall into it.

The hallmark of a good preconditioner is that it captures some aspects of the local curvature of the potential energy landscape, e.g. some of the directions in which the minimum is much shallower than in other directions. In this way, using the preconditioner enhances the convergence by reducing the condition number (see (2)). For example, it was recognised by many that geometry optimisation with a computationally expensive electronic structure model can be preconditioned using cheap empirical interatomic model. This approach is clearly not feasible for large scale problems in which the modeling method itself is a relatively cheap interatomic model.

A universal goal in preconditioning of condensed phase atomistic systems is to take account of the long wavelength vibrational modes, whose energies tend towards zero as the system size increases, while the eigenvalues corresponding to the high frequency optical modes stay constant. In order to capture this geometry, due to the intrinsic locality of the interaction Hamiltonian, it is enough to build a model that is aware of the neighbourhood structure of the constituent atoms or molecules.

In this work we use the simplest preconditioner that is capable of capturing this structure, the adjacency matrix of the atoms, or a smoothed variant using a distance cutoff. The only requirement of the cutoff is that it is chosen such that all atoms are assigned some neighbours. We choose example systems of current interest which have a wide range of system sizes.

For a steepest descent (SD) or nonlinear conjugate gradient (CG) scheme with preconditioner P one expects that the number n_P of iterations required to reach a relative residual τ is[6]

$$n_P \sim |\log \tau| \times \begin{cases} \kappa_P & \text{(SD)} \\ \sqrt{\kappa_P} & \text{(CG)}, \end{cases} \quad (1)$$

where κ_P is the condition number of the preconditioned Hessian at equilibrium,

$$\kappa_P = \lambda_{\max}/\lambda_{\min}, \quad (2)$$

and

$$\lambda_{\max} = \max_u \frac{u^T H u}{u^T P u} \quad (3)$$

$$\lambda_{\min} = \min_u \frac{u^T H u}{u^T P u} \quad (4)$$

are the largest and smallest eigenvalues.

For a material system with a diameter of R atomic spacings, without preconditioning (i.e. $P \equiv I$), one expects $\kappa_I \sim R$ while our preconditioner achieves that κ_P is independent of R . Therefore the expected efficiency gain is

$$\frac{n_P}{n_I} \approx \begin{cases} R^{-1} & \text{(SD)} \\ R^{-1/2} & \text{(CG)}. \end{cases} \quad (5)$$

The theory of the most commonly used Broyden-Fletcher-Goldfarb-Shanno (BFGS) and similar quasi-Newton type schemes is less clear, but numerical evidence suggests that a similar conclusion as in the CG case can be drawn.

2 Methods

2.1 Geometry Optimisation

Throughout, we let $f(x)$ denote the energy for a configuration x . If x_k is an iterate of an optimization algorithm then we denote the gradient and Hessian at x_k , by $g_k = \nabla f(x_k)$ and $H_k = \nabla^2 f(x_k)$, respectively.

The most basic geometry optimisation schemes are steepest descent and (undamped) Newton’s method,

$$x_{k+1} = x_k - \alpha_k g_k, \quad (6)$$

$$x_{k+1} = x_k - H_k^{-1} g_k. \quad (7)$$

While the former suffers from slow convergence to equilibrium due to ill-conditioning of the energy-landscape, the latter is usually impractical since (i) analytical Hessians are typically unavailable for complex interatomic potentials and electronic structure methods and (ii) are expensive to invert.

Line search is an essential part of all the above gradient descent algorithms, and preconditioning the line search (as opposed to preconditioning the Newton step) can be thought of as a middle ground, replacing H_k with an approximate Hessian P_k ,

$$x_{k+1} = x_k - \alpha_k P_k^{-1} g_k. \quad (8)$$

The usual requirements on P_k are that it is (1) cheap to build; (2) cheap to invert; and (3) positive definite to ensure descent in energy.

The most common way to construct P_k is via a quasi-Newton approach, typically (L)BFGS. This works poorly for large systems since many iterations are required to “learn the Hessian” to a useful degree of accuracy.

An alternative approach (sometimes used in the electronic structure community [7]) is to take $P_k = \nabla^2 \tilde{f}(x_k)$ to be the Hessian of a surrogate interatomic potential model \tilde{f} . This has considerable potential for performance gains if a good surrogate model \tilde{f} can be found. Downsides of this approach are (i) the challenge of finding or constructing such a surrogate model; (ii) indefiniteness of the surrogate Hessian in the nonlinear regime (and potentially even in the asymptotic regime); (iii) lack of transferability of the preconditioner: changing the system requires the construction of a new surrogate model.

2.2 Metric preconditioning

Assume, for the moment, that we use the same preconditioner throughout the optimization process, $P_k \equiv P$ in (8). An alternative point of view, which is common in the numerical linear algebra and nonlinear optimisation communities, is to think of P as defining a metric on the space of configurations. To see this note that calling $-g_k = -\nabla f(x_k)$ the *direction of steepest descent* is with reference to the ℓ^2 -norm $\|u\|_I := (\sum |u_i|^2)^{1/2}$ (where u is a direction in configuration space). If we measure distances in configuration space with respect to the P -norm, $\|u\|_P = (u^T P u)^{1/2}$, then the direction of steepest descent becomes

$$\arg \min_{\|u\|_P=1} u^T \nabla f(x) \propto -P^{-1} \nabla f(x). \quad (9)$$

That is, (8) is the natural steepest descent scheme with respect to the metric P_k . The advantage of this point of view is that it frees us from the constraint of aiming to approximate the Hessian. Instead we are now searching for an alternative notion of distance in configuration space, which is a more general concept and a fixed choice of metric may exist that is suitable for a wide range of atomistic systems.

Equivalently, we may think of (8) in terms of a change of coordinates. Let $\tilde{x}_k := P^{1/2} x_k$, and $F(\tilde{x}) = f(P^{-1/2} \tilde{x})$, then the ‘‘standard’’ gradient descent scheme $\tilde{x}_{k+1} = \tilde{x}_k - \alpha_k \nabla F(\tilde{x}_k)$ is equivalent to (8).

Since $\nabla^2 F(\tilde{x}) = P^{-1/2} \nabla^2 f(P^{-1/2} \tilde{x}) P^{-1/2}$ it follows that the rate of convergence $x_k \rightarrow x$ of (8) to a limit x is given by [8]

$$\|x_k - x\|_P \lesssim \left(\frac{\kappa_P - 1}{\kappa_P + 1} \right)^k \|x_0 - x\|_P,$$

where κ_P is the condition number of $P^{-1/2} H P^{-1/2}$. The latter can be computed from the generalised eigenvalue problem

$$Hv = \lambda P v. \quad (10)$$

While approximating the Hessian would lead us to aim for P such that $\kappa_P \approx 1$, we shall be content with a good notion of distance which will lead to a P such that κ_P is bounded by some moderate constant for a wide range of systems of interest.

Our final remark in this abstract context is that while the discussion of convergence rates applies strictly to the asymptotic regime of the iteration, preconditioning also improves performance in the pre-asymptotic regime: a moderate upper bound on κ_P implies, loosely speaking, that (8) relaxes all wavelength modes simultaneously rather than focusing on short wavelength modes first.

2.3 Preconditioned LBFGS

The usage of a preconditioner is not restricted to the steepest descent method, but it can be readily applied to improved optimisation algorithms such as nonlinear conjugate gradients. It is particularly effective when combined with the LBFGS scheme [6], for which we briefly outline the implementation.

Using $s_k = x_k - x_{k-1}$, $y_k = \nabla f(x_k) - \nabla f(x_{k-1})$, $\rho_k = 1/y_k^T s_k$ then the action of the inverse Hessian can be efficiently approximated,

$$\begin{aligned}
 & \mathbf{input} \quad q = \nabla f(x_k) \\
 & \mathbf{output} \quad z \approx \nabla^2 f(x_k)^{-1} \nabla f(x_k) \\
 & \text{for } i = k, \dots, k - m \\
 & \quad \alpha_i = \rho_i s_i^T q \\
 & \quad q = q - \alpha_i y_i \\
 & \boxed{z = P_k^{-1} q} \\
 & \text{for } i = k - m, \dots, k \\
 & \quad \beta_i = \rho_i y_i^T z \\
 & \quad z = z + (\alpha_i - \beta_i) s_i
 \end{aligned} \tag{11}$$

This formulation of LBFGS does not require the approximate Hessian itself to be stored, only the positions and gradients at previous iterates. For the initial iterate we simply obtain $z = P_0^{-1} \nabla f(x_0)$. The boxed step is the only modification needed to the standard algorithm to achieve preconditioning. After obtaining the output $p_k = z$ from (11), the LBFGS step takes the form

$$x_{k+1} = x_k + \alpha_k p_k, \tag{12}$$

for a suitable choice of step length α_k .

2.4 A simple and general metric for materials

Changes in energy of atomistic systems occur through changes in bonding, for which the simplest measure is change in bond-length. Motivated by this observation we propose the following preconditioner for materials systems: given parameters $r_{\text{cut}}, r_{\text{nn}}, A, \mu$ (we will discuss below how to choose these automatically) we define P via the quadratic form

$$\begin{aligned}
 u^T P u &= \mu \sum_{0 < |r_{ij}| < r_{\text{cut}}} c_{ij} |u_i - u_j|^2, \\
 c_{ij} &= \exp \left(-A \left(\frac{r_{ij}}{r_{\text{nn}}} - 1 \right) \right)
 \end{aligned}$$

or, written in matrix form

$$\begin{aligned}
 P_{ij} &= \begin{cases} -\mu c_{ij}, & |r_{ij}| < r_{\text{cut}} \\ 0, & |r_{ij}| \geq r_{\text{cut}} \end{cases}, \\
 P_{ii} &= -\sum_{j \neq i} P_{ij}.
 \end{aligned} \tag{13}$$

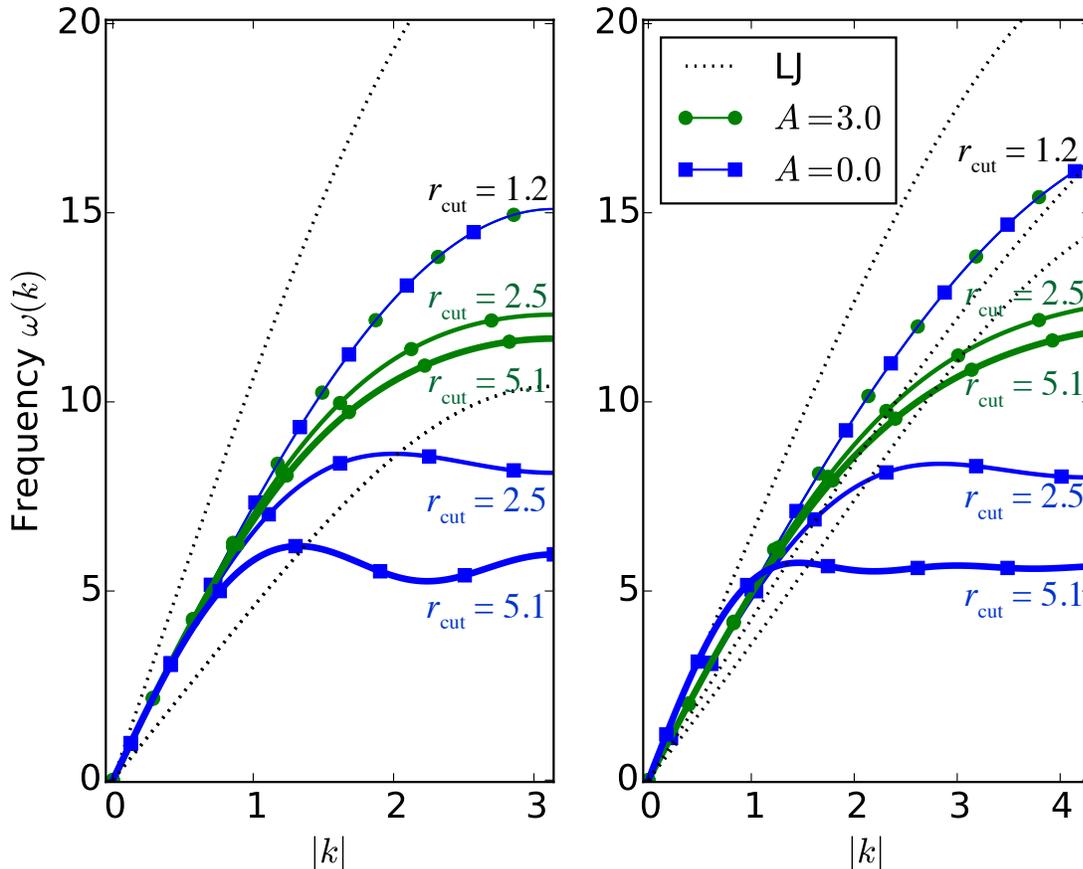


Figure 1: Spectra of the Lennard-Jones Hessian in the fcc ground state and of the preconditioner with $A \in \{0, 3\}$ and $r_{\text{cut}} \in \{1.2, 2.5, 5.1\}r_{\text{nn}}$ (top to bottom, with increasing line thickness). The graphs for $A = 0, 3$ with $r_{\text{cut}} = 1.2$ overlap. Left panel: $(1, 1, 0)$ direction, Right panel: $(2.7, 4.2, 3.0)$ direction.

Default parameters are discussed in section 2.5.

Remarks. (i) The exponential form of c_{ij} is for convenience, and has no deeper physical meaning; $A = 0$ corresponds to using the adjacency matrix with a hard cutoff. (ii) We use this metric even for multi-component systems, however, if the interaction strength and/or distances between different components varies significantly, then it would be straightforward to generalise it by distinguishing different types of bonds. (iii) As shown in the Appendix, for Bravais lattices, *phonon stability* is equivalent to the lower bound $u^T H u \geq c u^T P u$ for some constant $c > 0$.

Together with the generic and elementary upper bound $u^T H u \leq C u^T P u$ and equations (2)-(4) we obtain that for finite periodic supercells in a Bravais lattice state, the condition number κ_P for the preconditioned system is bounded above by C/c independently of the system size. In the presence of defects (crystal surfaces, point defects, dislocation lines) or even disorder partial results in this direction likely still hold because P contains the nearest neighbour bonds that dominate in H .

2.5 Default Parameters

The parameters A and r_{cut} are user inputs, however P is fairly insensitive to their choice, provided their interdependency illustrated in Figure 1 is taken into account. Hence, we suggest generic default parameters below. The parameters μ and r_{nn} are computed in a preprocessing step from the initial configuration of the optimisation.

1. The nearest-neighbour distance r_{nn} is obtained as the maximum of nearest neighbour bond-lengths: if $r_{\text{nn}}^{(i)} = \min_{j \neq i} r_{ij}$ then $r_{\text{nn}} = \max_i r_{\text{nn}}^{(i)}$.

2. The exponent A should be large enough to ensure that nearest neighbours dominate, but not so large that small changes in the configuration lead to large changes in P . All our tests are performed with $A = 0$ and $A = 3$; with $A = 3$ giving slightly better performance.

3. The cut-off r_{cut} should be larger than r_{nn} , however, then exponential decay of the preconditioner entries ensures that additional entries have a small influence. For $A = 0$ we choose $r_{\text{cut}} = 1.1r_{\text{nn}}$ and when $A = 3$ we use $r_{\text{cut}} = 2r_{\text{nn}}$. The latter choice is intuitively preferable since it accommodates the possibility of significant bond stretching.

4. Finally, the energy-scale μ is chosen to ensure that the LBFGS algorithm can choose the unit step-length as the default. We achieve this by equating

$$v^T (\nabla E(x_0 + v) - \nabla E(x_0)) = \mu v^T P_{\mu=1} v, \quad (14)$$

where $P_{\mu=1}$ is the metric with $\mu = 1$ and v is a test displacement of the form

$$v(x, y, z) = M (\sin(x/L_x), \sin(y/L_y), \sin(z/L_z)), \quad (15)$$

where L_i are the lengths of the periodic lattice vectors and M is a user-defined matrix with default value $M = 10^{-2} r_{\text{nn}} I$.

2.6 Implementation details

Preconditioner application. It is important that the cost of applying the preconditioner does not dominate the cost of the calculation over the evaluation of energy and gradient. For inexpensive models (Lennard-Jones, EAM, Stillinger–Weber, etc) the choice of method to solve $z = P_k^{-1} q$ in (11) is crucial. Our implementation uses a smoothed aggregation algebraic multigrid method [9]. As a further optimisation we only rebuild the preconditioner when the maximum atomic displacement since the last update exceeds $r_{\text{nn}}/2$.

Line search. Irrespective of the choice of the search direction used (e.g., SD (8), CG [6] or LBFGS (12)) a line search algorithm must be implemented to choose the length of the step, α_k . The standard choice is a bracketing algorithm which enforces sufficient decrease and approximate orthogonality between subsequent directions (Wolfe conditions). We observed in our tests that a backtracking algorithm imposing only sufficient decrease (Armijo condition), although less robust in theory, was more efficient in practise. We give the details of our implementation, and additional discussion, in section [Appendix A](#).

Robust energy differences. The computation of the energy differences and inner products in the Wolfe conditions (A1, A2) must be performed with a high degree of accuracy, since the optimization algorithm relies on robustly detecting the change in energy. A common

difficulty in implementing a line search strategy based on (A1, A2) is the numerical round-off error that arises for large numbers of atoms (typically 10^5 or higher). Numerically robust inner products are equally important in the inversion of the preconditioner and in the LBFGS algorithm. Numerically robust evaluation of energy differences and inner products may, for example, be implemented using compensated summation algorithms [10]. A simpler strategy which proved sufficient in our case is to use 128 bit floating point numbers for these steps.

Stabilisation. If the system contains clamped atoms then the preconditioner defined in (13) is strictly positive definite but in order to improve its conditioning and ensure positive definiteness for cases where there are no clamped atoms, we stabilize the preconditioner by adding a diagonal term,

$$P_{ij} = \begin{cases} -\mu c_{ij} & |r_{ij}| < r_{\text{cut}} \\ 0 & |r_{ij}| \geq r_{\text{cut}} \end{cases}, \quad (16)$$

$$P_{ii} = -\sum_{j \neq i} P_{ij} + \mu C_{\text{stab}}.$$

In all our results we choose $C_{\text{stab}} = 0.1$. Even when there are clamped atoms, we find that setting $C_{\text{stab}} = 0.1$ improves overall performance.

Variable cell optimisation. We confirmed that our preconditioner also gives good performance when degrees of freedom associated with the periodic unit cell are included as well as the atomic positions. Following the approach of Tadmor et al. [11], we consider a combined objective function $\Phi(x, D) = f(Dx)$ with $3N + 9$ degrees of freedom: $3N$ for the atomic positions x and 9 components of the deformation tensor D , which is with respect to the original undeformed unit cell. The combined gradient is then given by

$$\nabla_{x,D} \Phi(x, D) = \left(D \nabla_x f(x), \frac{V}{\mu_c} \sigma (D^{-1})^T \right) \quad (17)$$

where V is the cell volume and σ the stress tensor, and we have introduced an additional preconditioner parameter μ_c to set the energy scale for the cell degrees of freedom. μ_c can be pre-computed at the same time as μ for no additional cost by including a trial perturbation of the cell in (15), with default $v(x_c) = M/r_{nn} = 10^{-2}I$.

3 Results

We have selected a broad range of materials examples to test our preconditioner. The first is a 160 Si atom $1 \times 1 \times 20$ supercell of the cubic diamond structure cell in a slab geometry, with periodic boundary conditions along x and y and free boundaries in z , simulated with the Stillinger-Weber interatomic potential [12]. The two halves of the cell (along z) are uniformly displaced toward each other by 0.5 \AA , creating a large but very localized strain in the center of the slab. The problem is ill-conditioned because the initial strain is localized, but reaching the relaxed geometry requires all the slab atoms to move out towards the free surfaces. As shown in Fig. 2, both the $A = 0$ and $A = 3$ preconditioners dramatically reduce the computational cost of the minimization, by a factor of about 6 compared to the non-preconditioned minimizer. Note that even for this relatively fast interatomic potential the computational cost of applying

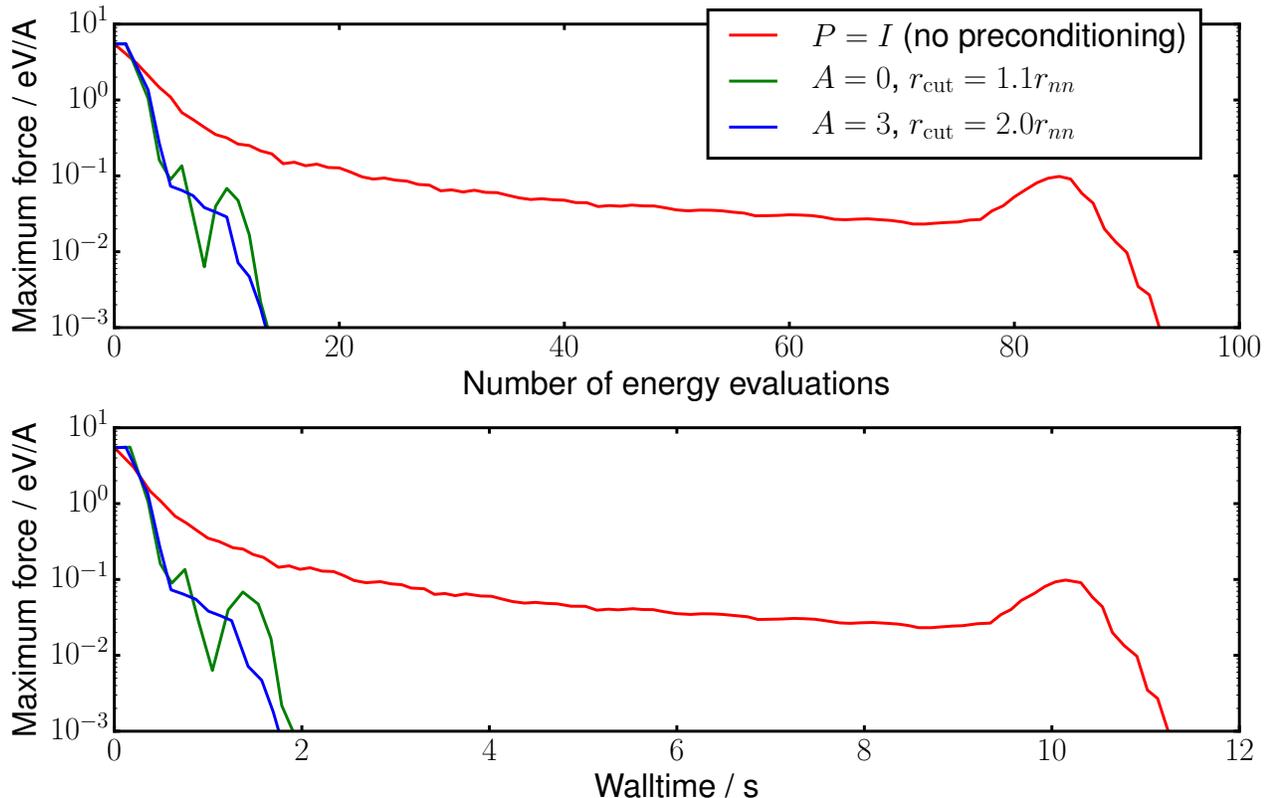


Figure 2: Convergence of the geometry optimisation of a 160-atom silicon slab using the Stillinger-Weber potential in fixed unit cell. The parameters of the preconditioner (or not using a preconditioner) are given in the legend. The lower panel shows the time required to solve the problem in each case, indicating that the overhead of constructing and applying the preconditioner is minimal in comparison to the cost of computing forces with the interatomic potential.

the preconditioner is nearly negligible, so the reduction in computational time is nearly equal to the reduction in number of energy evaluations.

Next we consider a 33,696-atom Si model of the $(111)[11\bar{2}]$ cleavage system (Fig. 3) in a quasi-two-dimensional thin strip geometry with dimensions $717 \times 242 \times 3.84 \text{ \AA}^3$. The applied strain was chosen so that the crack is lattice trapped [13], leading to a stable ground state with the Stillinger-Weber [12] interatomic potential. Strong coupling between length scales makes this a difficult system to optimize and hence a good test of our preconditioner. A complex trade off between local chemical cost and long-range elastic relaxation makes it favourable for a 5–7 crack tip reconstruction to form via a bond rotation [14]. Here, we find that both the $A = 0$ and $A = 3$ preconditioners lead to a significant speed up. Fig. 3 also includes a comparison between the Armijo and Wolfe line searches. As noted above, enforcing only the Armijo condition leads to a further increase in performance.

Since large systems inherently have a wide range of displacement wavelengths and corresponding stiffnesses, it is not obvious *a priori* how much preconditioning will help for a smaller system, for example one that can feasibly be simulated using density functional theory. We

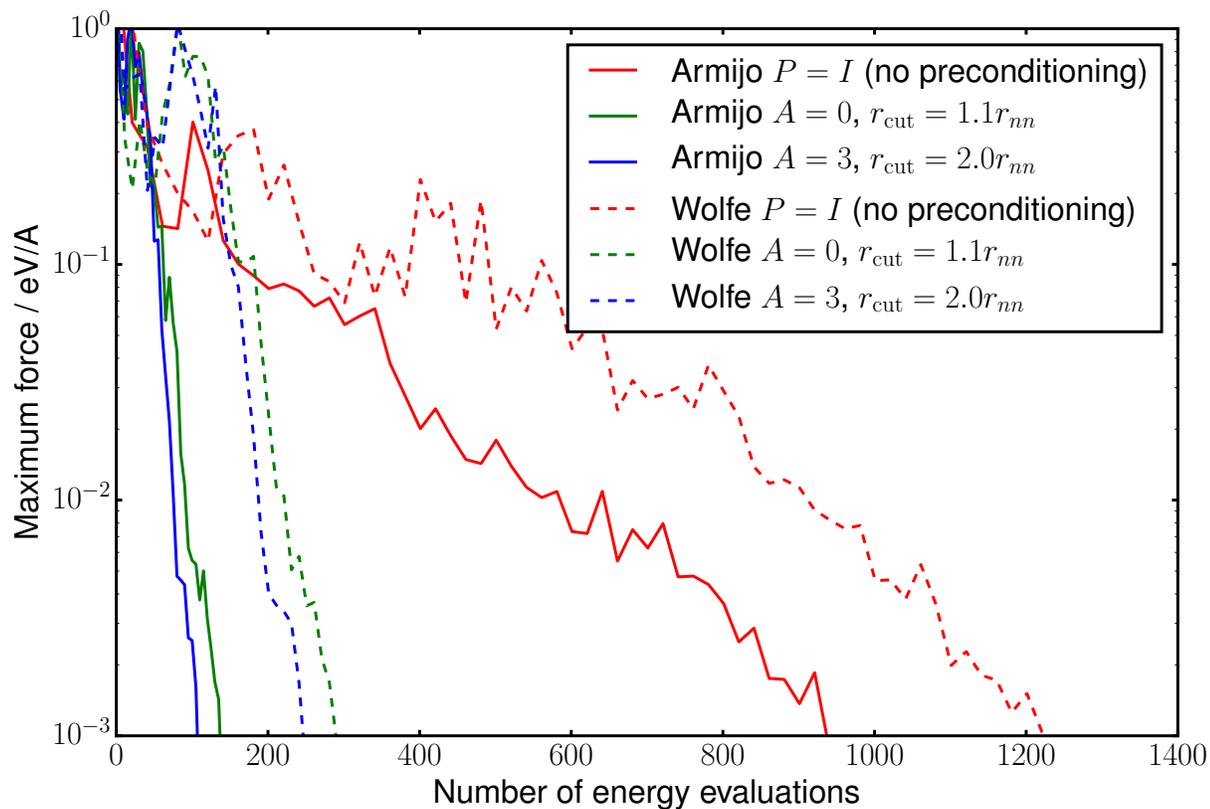


Figure 3: Convergence of the geometry optimisation of a silicon crack using the Stillinger-Weber potential in a fixed unit cell with 33,696 atoms. Solid and dashed lines correspond to using line searches enforcing Armijo and Wolfe conditions, respectively. The parameters of the preconditioner (or not using a preconditioner) are given in the legend.

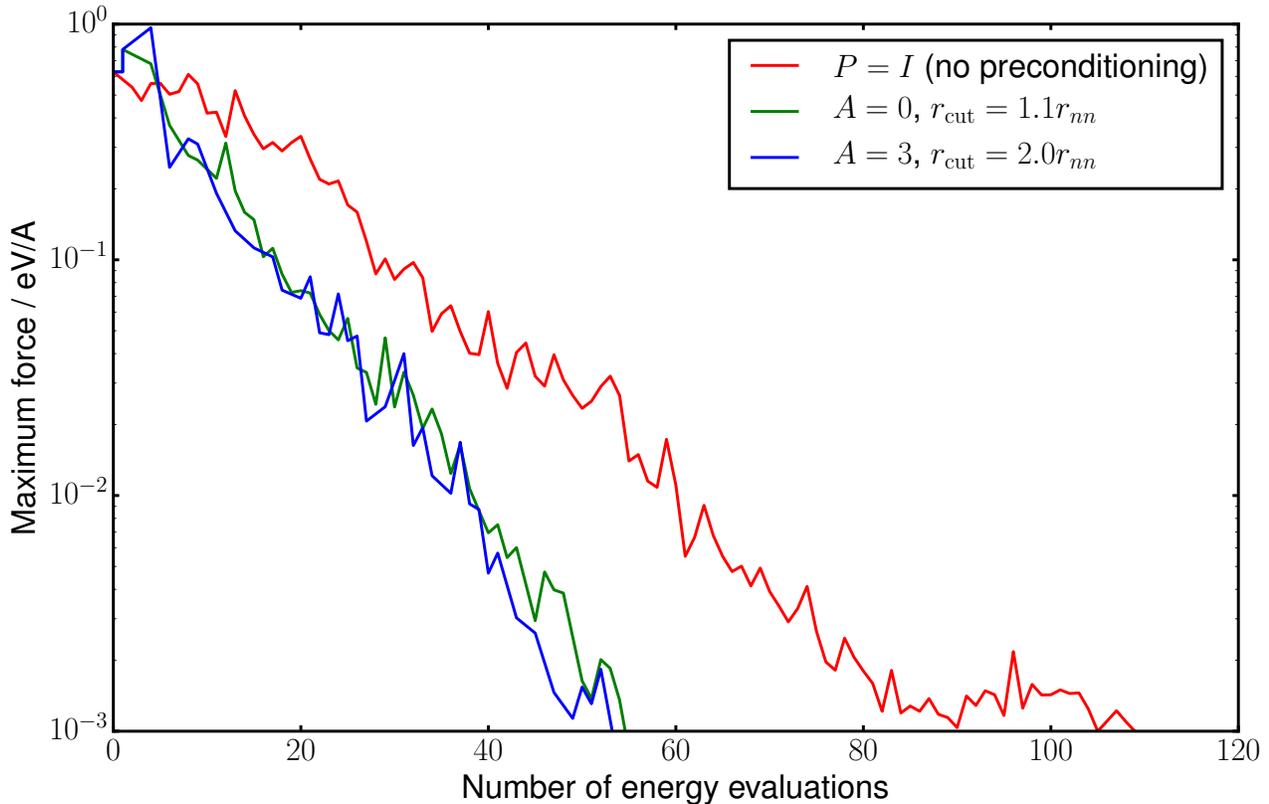


Figure 4: Convergence of the geometry optimisation of a 220-atom LaAlO_3 slab using DFT in a fixed unit cell. The parameters of the preconditioner (or not using a preconditioner) are given in the legend.

therefore simulated a perovskite structure oxide, LaAlO_3 , in a 220-atom slab geometry with periodic boundary conditions in-plane and free surfaces separated by a vacuum region in the normal direction. Energy and force evaluations used DFT with the PBE exchange correlation functional, projector-augmented waves (PAW) with a 282.8 eV cutoff plane-wave basis, and a $2 \times 2 \times 1$ Monkhorst-Pack k-point sampling, evaluated using the QUIP interface to the VASP software [15, 16, 17]. In this system, as shown in Fig. 4, we find that the preconditioning still significantly reduces the computational cost, but the improvement is not as dramatic as for the larger systems discussed above. With our convergence criterion the reduction is about a factor of two, although the non-preconditioned minimization stagnates just before reaching convergence, and with a slightly looser criterion the reduction would only be a factor of 1.6. Note that the computational cost of the DFT energy and force evaluations is so large that the application of the preconditioner is completely negligible in comparison.

For a test of the relaxation of both atomic positions and unit cell size and shape we used a $1 \times 1 \times 2$ supercell of a $\gamma\text{-Al}_2\text{O}_3$ structure, with methods similar to those described above for LaAlO_3 , except for a 530 eV plane wave cutoff and a Γ -centered k-point mesh. For this system, plotted in Fig. 5, the reduction in computations for both preconditioners is about a factor of 5, a very significant improvement. While the non-preconditioned minimizer fails to make progress at several points during the relaxation, both preconditioners allow the LBFGS minimizer to

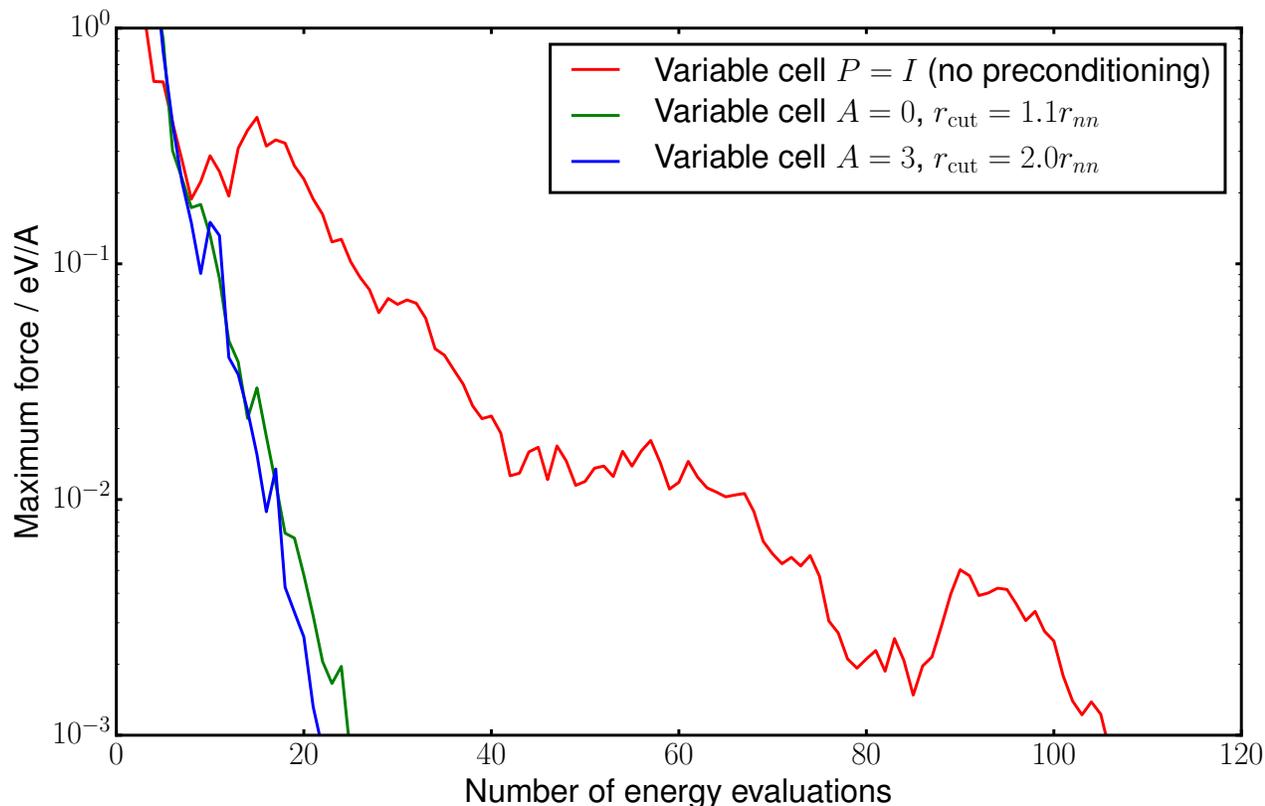


Figure 5: Convergence of the geometry optimisation of a 106-atom γ - Al_2O_3 system in a variable cell. The parameters of the preconditioner (or not using a preconditioner) are given in the legend.

rapidly and steadily reduce the gradient until convergence. The addition of the cell degrees of freedom, which are preconditioned in magnitude but not coupled to the positional degrees of freedom, do not reduce the effectiveness of our preconditioners.

Finally we tested the new preconditioner for a molecular system, ice VIII. The system contained 432 atoms with an initial cell dimension of $13.65 \times 13.65 \times 13.16 \text{ \AA}^3$. A DFT potential with BLYP exchange-correlation functional was used with DZVP basis set and GTH pseudopotentials. Calculations were performed by the CP2K program package using the QUIP interface [15, 18, 19]. Figure 6 shows the the number of energy evaluation of the different optimisations for fixed and variable cells using a maximum force threshold of $10^{-3} \text{ eV \AA}^{-1}$. Similarly to previous systems, the Armijo condition performed better than Wolfe so we present here only the results with the former line search. In the $A = 0$ case we slightly increased the default cutoff parameter ($r_{\text{cut}} = 2.25 \text{ \AA}$) to include hydrogen bonded neighbours too. For both the fixed and variable cells the computational costs compared to the unpreconditioned optimisation were reduced by 3 and 4 times using $A = 0$ and $A = 3$, respectively.

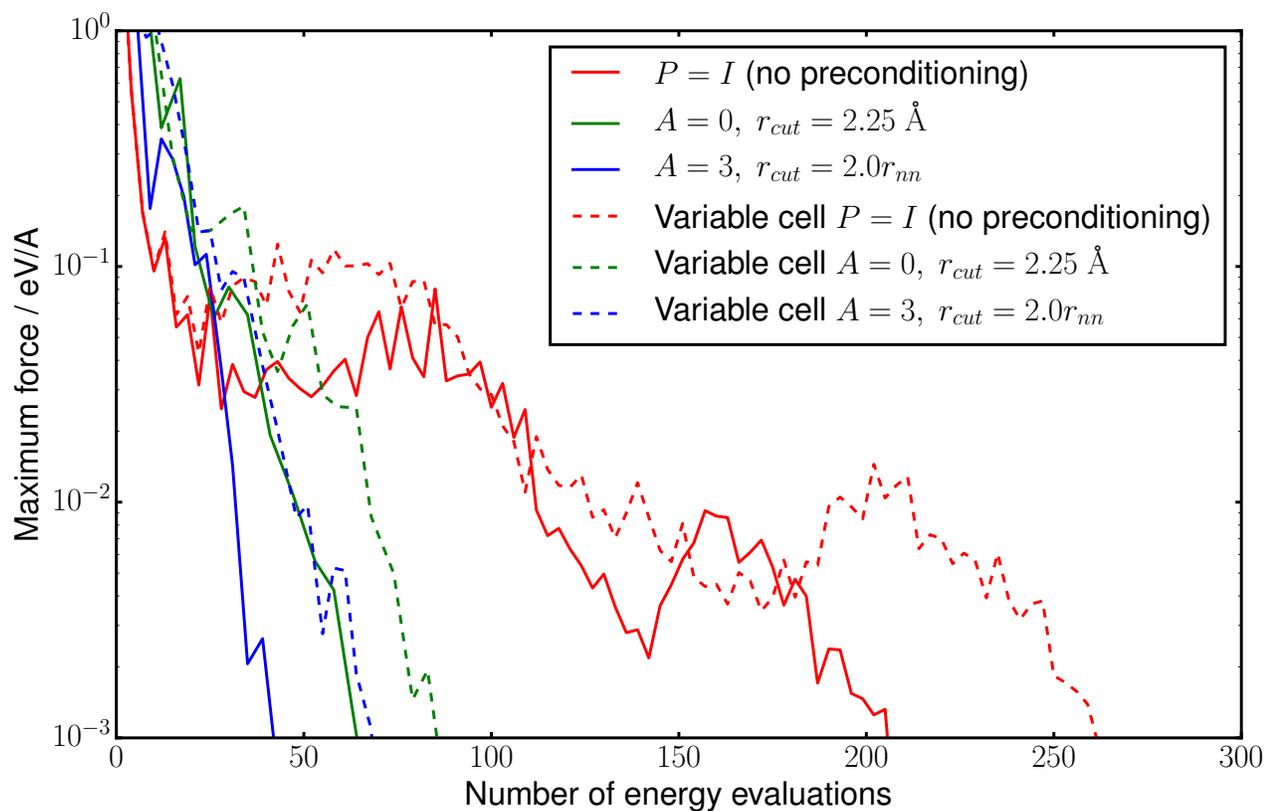


Figure 6: Convergence of the geometry optimisation of a 432-atom ice VIII system with fixed (solid lines) and variable (dashed lines) unit cells. The parameters of the preconditioner (or not using a preconditioner) are given in the legend.

4 Saddle search

To demonstrate the transferability of our preconditioner not only across problem classes but also across algorithms, we apply it to the dimer saddle search algorithm [20, 21]. A modified variant of the algorithm proposed in [21] reads

$$\begin{aligned} x_{k+1} &= x_k - \alpha \left(P_k^{-1} - 2v_k v_k^T \right) \frac{\nabla f(x_k + hv_k) + \nabla f(x_k - hv_k)}{2}, \\ v'_{k+1} &= v_k - \beta \left(I - P_k v_k v_k^T \right) \frac{\nabla f(x_k + hv_k) - \nabla f(x_k - hv_k)}{2h}, \\ v_{k+1} &= v'_{k+1} / \|v'_{k+1}\|_{P_{k+1}}. \end{aligned}$$

The translation step is obtained as coordinate transformation of the standard dimer step with the variables $\tilde{x}_k = P_k^{1/2} x_k$, $\tilde{v}_k = P_k^{1/2} v_k$ (cf. §2.2). The orientation step is an ℓ^2 -steepest descent step (without preconditioning) for the Rayleigh-quotient $v^T \nabla^2 f(x_k) v / v^T P_k v$, with a finite-difference approximation of $\nabla^2 f(x_k) v$. Interestingly, naive preconditioning of the orientation steps led to poorer performance in our tests.

We test this preconditioned dimer algorithm by computing the saddle configuration of a vacancy in a Lennard-Jones fcc crystal, with a cubic computational cell. Given two states $x^{(0)}, x^{(1)}$ which have two neighbouring lattice sites removed, we choose the starting configuration $x_0 = \frac{1}{3}x^{(0)} + \frac{2}{3}x^{(1)}$ and $v_0 \propto x^{(1)} - x^{(0)}$. The step-sizes are chosen by hand-optimising for a small setup with 3^3 unit cells: $\alpha = 0.01, \beta = 0.005$ for the unpreconditioned variant ($P_k = I$) and $\alpha = 0.5, \beta = 0.01$ for our preconditioner with parameters $A = 3.0, r_{\text{rcut}} = 2r_{\text{nn}}$. For both variants we chose $h = 10^{-2}$. The results are displayed in Figure 7, demonstrating analogous improvements to the energy minimisation examples.

5 Conclusions

In summary, we have presented a simple preconditioner for geometry optimisation and saddle search that is universally applicable in a wide range of atomistic and molecular condensed phase systems, offering at least a factor of two in performance gain in our examples of small systems, and up to factor of ten in systems of tens of thousands of atoms. The extra cost of using the preconditioner is small enough that it is worth using even with inexpensive interatomic potentials, while the performance gain is expected to scale as the square root of the system size. A Python implementation within the Atomic Simulation Environment [22] is available at <https://gitlab.com/jameskermode/ase>, offering interfaces to a wide range of atomistic codes such as VASP [16], CASTEP [23], CP2K [18], LAMMPS [24], and many others.

Acknowledgments

The computing facilities were provided by the Centre for Scientific Computing of the University of Warwick with support from the Science Research Investment Fund. We thank C. S. Hellberg and M. D. Johannes for the LaAlO_3 and $\gamma\text{-Al}_2\text{O}_3$ atomic configurations.

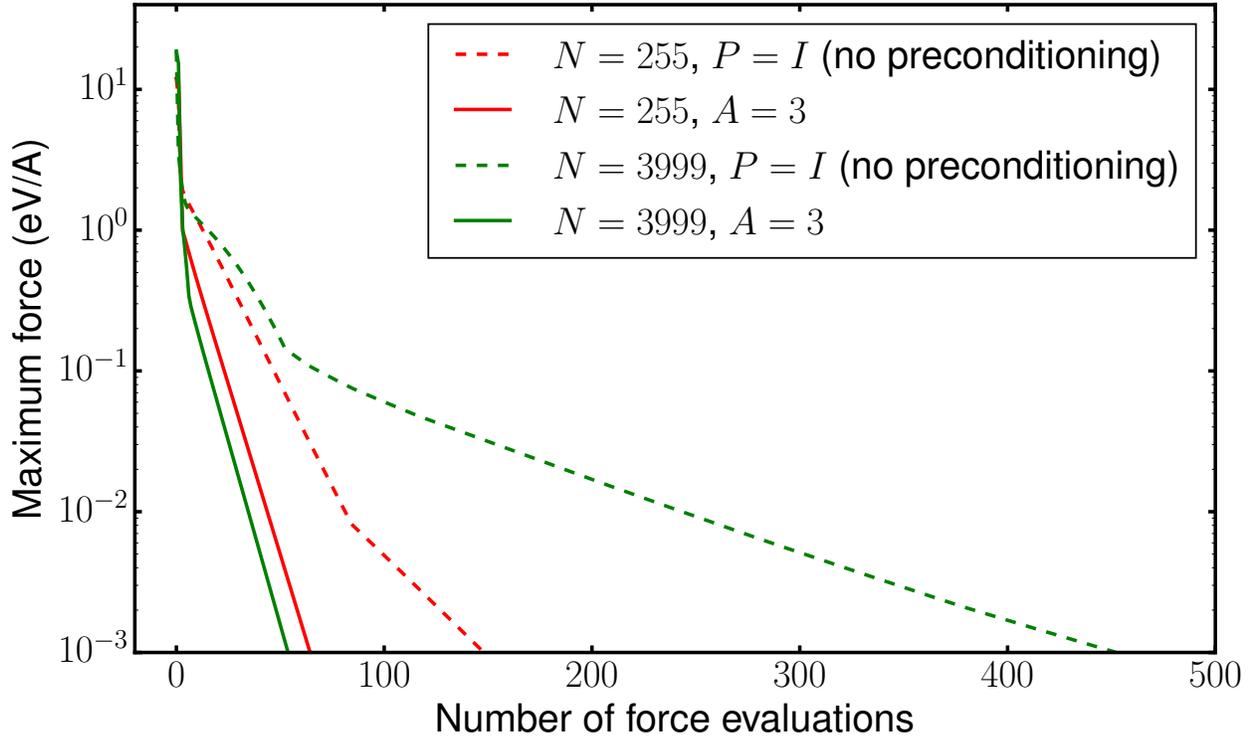


Figure 7: Performance of the preconditioned dimer method for a vacancy in a Lennard-Jones fcc crystal (solid lines), and without a preconditioner (dashed lines), for two system sizes.

Appendix A: Linesearch

We present the details of our line search algorithm. The standard requirement for the LBFGS and CG methods is that the step-size, α , satisfies the Wolfe conditions

$$f(x_k + \alpha p_k) \leq f(x_k) + c_1 \alpha \nabla f_k^T p_k, \quad (\text{A1})$$

$$|\nabla f(x_k + \alpha p_k)^T p_k| \leq c_2 |\nabla f_k^T p_k|, \quad (\text{A2})$$

where $0 < c_2 < c_1 < 1$. Line search methods that guarantee (A1) and (A2) employ a bracketing strategy, which often requires several additional energy and force evaluations at each iteration.

For the steepest descent method it is theoretically sufficient to impose only the Armijo condition (A1). We have observed that this was also sufficient in all our tests to ensure convergence of the LBFGS method and leads to a consistent performance improvement. Our implementation minimises the quadratic interpolating $f_k, \nabla f_k^T p_k$ and $f(x_k + \alpha p_k)$, iterating until (A1) is satisfied. For $c_1 < 1/2$ this yields a backtracking guarantee and hence ensures that the line search terminates after finitely many steps. Our default parameter is $c_1 = 0.1$. The initial estimate on the step-length is $\tilde{\alpha} = 1.0$.

$$\begin{aligned}
&\mathbf{input} \quad x, \tilde{\alpha} > 0, c_1 \in (0, 1/2), p \text{ s.t. } \nabla f(x) \cdot p < 0. \\
&\mathbf{output} \quad \tilde{\alpha}. \\
&\text{while } f(x + \tilde{\alpha}p) > f(x) + c_1 \tilde{\alpha} \nabla f(x) \cdot p \\
&\quad \tilde{\alpha}' \leftarrow \frac{-\frac{1}{2} \tilde{\alpha} \nabla f(x) \cdot p}{\frac{f(x + \tilde{\alpha}p) - f(x)}{\tilde{\alpha}} - \nabla f(x) \cdot p} \\
&\quad \tilde{\alpha} \leftarrow \max(\tilde{\alpha}', \tilde{\alpha}/10)
\end{aligned} \tag{A3}$$

Unlike for a bracketing line-search, the only additional evaluations required during line search are energy evaluations at the end-point of the search interval, which reduces computational cost in the pre-asymptotic regime of the optimisation.

In the asymptotic regime, the step-length $\alpha_k = 1$ is always accepted, and will satisfy both Wolfe conditions (A1) and (A2) provided that $c_1 < 1/2$. Since, through the use of our proposed preconditioner, we substantially reduce the number of iterations, it is unlikely that the *potential* instabilities associated with Armijo line search for the LBFGS direction will be observed.

Appendix B: Phonon Stability

Consider a d -dimensional Bravais lattice $\Lambda = A\mathbb{Z}^d$, where \mathbb{Z} is the set of integers and the columns of A are the lattice directions, which is the ground state for some material system under a potential energy f . Let $H = \nabla^2 f$ denote the Hessian of the potential energy in the ground state. For displacements u_r of each atom $r \in \Lambda$ we can write

$$[Hu]_r = \sum_{s \in \Lambda} H_{rs} u_s, \tag{A4}$$

where $H_{rs} \in \mathbb{R}^{d \times d}$ are the blocks of H . We now prove the claim that phonon stability is equivalent to the bound $u^T H u \geq u^T P u$, where P is the preconditioner defined in (13), for all displacements of the lattice.

The discrete translation invariance of the lattice, $\Lambda + r = \Lambda$ for all $r \in \Lambda$, implies that $H_{rs} = H_{0, s-r} =: h_{s-r}$ where $h \in \mathbb{R}^{d \times d}$. For any virtual displacement $u = (u_r)$ with compact support we have

$$u^T H u = \int_{\text{BZ}} \hat{u}^* \hat{h} \hat{u} dk, \tag{A5}$$

where \hat{u} and \hat{h} denote the Fourier transforms of u and h , respectively and the integration is over the first Brillouin zone. Phonon stability means that the natural frequencies are positive and linear near the origin. In terms of \hat{h} , this translates to $\hat{h}(k) \geq c_H |k|^2 I$ for some constant $c_H > 0$. The upper bound $\hat{h}(k) \leq C_H |k|^2 I$ follows from the boundedness of the phonon band width. (A sufficient condition is that $\sum_{r \in \Lambda} |h_r| |r|^2 < \infty$.)

Let $P_{rs} = p_{s-r} \in \mathbb{R}^{d \times d}$ denote the corresponding blocks of the preconditioner operator. The upper bound $\hat{p} \leq C_P |k|^2 I$ follows simply from the fact that the preconditioner has a finite

interaction range. This upper bound and phonon stability of H imply

$$\begin{aligned} u^T H u &\geq c_H \int_{\text{BZ}} |k|^2 |\hat{u}|^2 dk \\ &\geq \frac{c_H}{C_P} \int_{\text{BZ}} \hat{u}^* \hat{p} \hat{u} \\ &= \frac{c_H}{C_P} u^T P u. \end{aligned}$$

Conversely, if $u^T H u \geq c u^T P u$, then phonon stability of P implies phonon stability of H . But the former is an immediate consequence of the fact that the coefficients in the definition of P are positive.[25]

References

- [1] D. Wales. *Energy landscapes: Applications to clusters, biomolecules and glasses*. Cambridge University Press, 2003.
- [2] C. J. Pickard and R. J. Needs. Ab initio random structure searching. *J. Phys. Condens. Matter*, 23(5):053201, 9 February 2011.
- [3] A. Voter. Hyperdynamics: Accelerated molecular dynamics of infrequent events. *Phys. Rev. Lett.*, 78(20):3908–3911, May 1997.
- [4] M. C. Payne, M. P. Teter, D. C. Allan, T. A. Arias and J. D. Joannopoulos. Iterative minimization techniques for ab initio total-energy calculations: molecular dynamics and conjugate gradients, 1992.
- [5] H. C. Elman, D. J. Silvester, and A. J. Wathen. *Finite elements and fast iterative solvers: with applications in incompressible fluid dynamics*. Oxford University Press, 2014.
- [6] J. Nocedal and S. J. Wright. *Numerical Optimization*. Springer Series in Operations Research and Financial Engineering. Springer New York, 2006.
- [7] M. V. Fernandez-Serra, E. Artacho and J. M. Soler. Model Hessian for accelerating first-principles structure optimizations. *Phys. Rev. B*, 67:100101, 2013.
- [8] D. P. Bertsekas. *Nonlinear Programming 2nd Edition*. Athena Scientific, 1999.
- [9] W. N. Bell, L. N. Olson and J. B. Schroder. PyAMG: Algebraic multigrid solvers in Python v2.0, 2011. Release 2.0.
- [10] N. J. Higham. *Accuracy and Stability of Numerical Algorithms*. SIAM, 2002.
- [11] E. B. Tadmor, G. S. Smith, N. Bernstein and E. Kaxiras. Mixed finite element and atomistic formulation for complex crystals. *Phys. Rev. B Condens. Matter*, 59(1):235–245, 1 January 1999.

- [12] F. H. Stillinger and T. A. Weber. Computer simulation of local order in condensed phases of silicon. *Phys. Rev. B Condens. Matter*, 31:5262–5271, 1985.
- [13] R. Thomson, C. Hsieh and V. Rana. Lattice trapping of fracture cracks. *J. Appl. Phys.*, 42:3154, 1971.
- [14] J. R. Kermode, T. Albaret, D. Sherman, N. Bernstein, P. Gumbsch, M. C. Payne, G. Csányi and A. De Vita. Low-speed fracture instabilities in a brittle crystal. *Nature*, 455(7217):1224–1227, 30 October 2008.
- [15] G. Csányi, S. Winfield, J. R. Kermode A. De Vita, A. Comisso, N. Bernstein and M. C. Payne. *IoP Comput. Phys. Newsl. Spring 2007*, 2007.
- [16] G. Kresse and J. Hafner. Ab initio molecular-dynamics simulation of the liquid-metal-amorphous-semiconductor transition in germanium. *Phys. Rev. B Condens. Matter*, 49:14251, 1994.
- [17] G. Kresse and J. Furthmüller. Efficient iterative schemes for ab initio total-energy calculations using a plane-wave basis set. *Phys. Rev. B Condens. Matter*, 54:11169, 1996.
- [18] J. VandeVondele, M. Krack, F. Mohamed, M. Parrinello, T. Chassaing and J. Hutter. Quickstep: Fast and accurate density functional calculations using a mixed gaussian and plane waves approach. *Comput. Phys. Commun.*, 167(2):103–128, April 2005.
- [19] J. Hutter, M. Iannuzzi, F. Schiffmann and J. VandeVondele. Cp2K: Atomistic simulations of condensed matter systems. *Wiley Interdiscip. Rev. Comput. Mol. Sci.*, 4(1):15–25, 13 January 2014.
- [20] G. Henkelman and H. Jónsson. A dimer method for finding saddle points on high dimensional potential surfaces using only first derivatives. *Journal of Chemical Physics*, 111(5):7010–7022, 1999.
- [21] N. I .M. Gould, C. Ortner, and D. Packwood. An efficient dimer method with preconditioning and linesearch. to appear, *Math. Comp.*, 2016.
- [22] S R Bahn and K W Jacobsen. An object-oriented scripting interface to a legacy electronic structure code. *Comput. Sci. Eng.*, 4(3):56–66, 2002.
- [23] S. J. Clark, M.Ď. Segall, C. J. Pickard, P. J. Hasnip, M. I J. Probert, K. Refson and M. C. Payne. First principles methods using CASTEP. *Z. Kristallogr.*, 220(5/6/2005):567–570, 2005.
- [24] S. Plimpton. Fast parallel algorithms for short-range molecular dynamics. *J. Comp. Phys.*, 117(1):1–19, 1995.
- [25] M. Born and K. Huang. *Dynamical Theory of Crystal Lattices*. Clarendon Press, 1998.