

ARCHITECTURAL CONSIDERATIONS FOR RECIRCULATED AND ENERGY RECOVERED HARD XFEL DRIVERS*

S. Benson, D. Douglas, Y. Roblin, T. Satogata, T. Powers, C. Tennant[†], Jefferson Lab, 12000 Jefferson Avenue, Newport News, Virginia, 23606 USA

R. York, FRIB/NSCL, Michigan State University, East Lansing, Michigan, 48823 USA

D. Angal-Kalinin, N. Thompson, A. Wheelhouse, P. Williams, STFC Daresbury Laboratory and Cockcroft Institute, Daresbury, Warrington, WA4 4AD UK

T. Charles, CERN, 1211 Geneva 23, Switzerland

Abstract

A confluence of events motivates discussion of design options for hard x-ray free electron laser (XFEL) driver accelerators. Firstly, multiple superconducting radio-frequency (SRF) driven systems are coming online (European XFEL), in construction (LCLS-II, SCLF), or in design (MARIE); these provide increasing evidence of the transformational potential they offer for fundamental science with its concomitant benefits. Secondly, successful operation of 12 GeV CEBAF [1] validates use of recirculation in the design of high energy SRF linacs. Thirdly, advances in the analysis and control of various effects – including coherent synchrotron radiation (CSR) and the microbunching instability (μ BI) – have been recently achieved. Taken collectively, these developments offer opportunities to extend facility science reach, reduce cost, provide multiplicity (*i.e.*, support numerous FELs operating over a range of wavelengths), and enhance scalability and upgradability (to higher powers and energies). We discuss the relationship amongst the various threads, and indicate how they inform design choices for the system architecture of an option for the UK-XFEL [2] – that of a staged multi-user X-Ray FEL and nuclear physics facility based on a multi-pass recirculating SRF CW linac.

OVERVIEW

Energy-recovered [3] and recirculated [4] superconducting [5] accelerators were first envisioned a half-century ago, and the use of both as FEL drivers has been subsequently explored [6-9]. Such accelerators may be cost/performance optimized in many ways, including the choice of RF architecture (SRF or NCRF, pulsed or CW), use of recirculation, and desired multiplicity of FELs. Choices amongst these options are driven by end-user requirements; here, we explore the implications of service in a single facility to a range of users, with pulsed or CW photon beams from the EUV to hard X-ray regimes.

SYSTEM REQUIREMENTS

FEL driver accelerators share a common suite of requirements that have been detailed in previous discussions [6-9]. The system must produce beam(s) at the en-

ergy (or energies) required to drive the FEL(s). Bunch charge, repetition rate, and bunch time structure must be adequate to provide the power and timing required by users. The system must generate beams of adequate brightness, configure them appropriately for each FEL, and preserve beam quality through acceleration, transport (including, possibly, multiple recirculations), and – if so required – energy recovery. These requirements must be met while satisfying constraints such as finite accelerator acceptance, RF drive limitations, and operational implications of service to multiple users. Additionally, appropriate stability issues must be addressed, including collective effects, interaction with the accelerator environment, and implications of phenomena such as halo.

BEAM FORMATION

Various injector designs provide “proof of principle” solutions for CW XFEL drivers. An operational demonstration is given by the Cornell injector [10], which offers the requisite bunch charge, repetition rate, energy, beam brightness, and cathode lifetime needed for high power/energy multi-FEL facilities.

LONGITUDINAL MATCHING

Longitudinal matching is a defining feature of recirculated architectures, in that it defines how the injected beam (of low momentum spread and long bunch length, to mitigate collective effects) is manipulated during acceleration, transport, delivery to the FEL and energy recovery (should that be a requirement). Longitudinal matching solutions have been in use in CW systems for over two decades [11]; the influence of collective effects, such as space charge, CSR, and the μ BI have more recently been successfully addressed [12, 13]. Very recently, caustic methods applied in other dynamical systems have been used for accelerator longitudinal matching, providing a powerful tool for developing robust solutions [14].

In addition to beam quality preservation, the longitudinal match is of critical importance in defining the RF dynamics [15]. For example, choices of linac operating phase and transport momentum compaction values influence RF transient behavior. Further choices are driven by phase space distortion such as RF curvature, which may be corrected using harmonic RF and/or DC magnetic compensation. Pulsed FEL drivers have successfully implemented harmonic correction/linearization [16], while

* This material is based upon work supported by the U.S. Department of Energy, Office of Science, Office of Nuclear physics under contract DE-AC05-06OR23177, and by the UK Science & Technology Facilities Council.

[†] tennant@jlab.org

to date all operating SRF FEL drivers have employed only beam-transport-based schemes [17].

RECIRCULATION : OPTIMIZATION AND INSTABILITIES

The successful commissioning and initial operation of 12 GeV CEBAF [1] provides an operational demonstration for large-scale application of SRF technology in a recirculated architecture. Scaling of such solutions to higher currents will involve extensions of existing experience. The first of these involves the beam break-up (BBU) instability; this effect is well understood and manageable given measurements performed in the JLab IR Upgrade FEL-ERL [18], which (indirectly) observed thresholds of hundreds of mA, and tuned the system to establish absolute stability. SRF cavity design now regularly provides control of BBU at the levels required [19, 20].

Choice of RF frequency has historically depended on prior work, but tools allowing broad cost/performance analysis are available [21] which indicate that a broad optimum exists near 800 MHz.

Design and operational experience with multiple SRF systems indicates that a full system-wide optimization is required. In particular, the “best injected beam” does not necessarily lead to the “best delivered beam”, because an overly-bright beam can degrade in the linac front end [22]. A design-time optimization of the injector/linac interface sets the optimum injected beam parameters [7].

Linac focusing structure is a prominent feature of this process, and provides performance constraints. As the number of recirculations, energy and length, increase, focusing on higher passes becomes weaker, resulting in larger lattice beam envelopes, with consequent increases in sensitivity to errors and collective effects. Appropriate choices of system configuration, such as the use of asymmetrically split linacs [23] can be palliative.

Use of recirculation provides significant cost-optimization, but also introduces potential for degradation of beam quality. Challenges include incoherent synchrotron radiation (ISR) and CSR, as well as instabilities such as the μ BI, which involve combinations of longitudinal space charge (LSC) and/or CSR and bunch length modulation with energy via the transport system momentum compaction. ISR has been recognized for half a century as an issue in recirculated systems [5], and have been addressed in system designs [24] through the use of bend radius and low-quantum-excitation lattice designs. Recently, methods for control of CSR- and μ BI-driven degradation have been developed [25-27] and provide means of providing adequate beam quality while implementing recirculation-based system architectures for XFEL drivers.

COMPRESSOR SYSTEMS

Bunch compression is a critical challenge for short-wavelength FEL driver designs, regardless of system architecture. Recent work [28] provides insight on the limits

of, and an existence proof for, multi-GeV full-energy compressors that would be useful for implementation in a multi-FEL facility. Results at GeV scales [29-31] provide compact configurations and in combination with emittance-preserving recirculation transport.

USE OF ENERGY RECOVERY

Recirculation and energy recovery are simply cost optimization measures, in which linac and RF drive are traded for beam transport until an optimum of cost and performance are achieved. Tools for performing such optimizations exist and have been applied in example cases [21], providing guidance as to the applicability of either for specific facility design parameter sets. Recirculation becomes increasingly attractive for higher energy systems, so as to save on costs of linac hardware; energy recovery is similarly attractive at higher currents, as it saves significant expenditures on RF power.

ONGOING CHALLENGES

Though progress has been made on all aspects of the architecture of recirculated [1] and energy recovered SRF linacs [32, 33], challenges remain. Legacy systems have operated at only 1 MW full-energy beam power, and were thus largely able to run without full understanding and control over beam halo [34]. Extrapolation to 10 MW and higher will require suppression of localized beam losses to a few parts per million. This has as yet not been demonstrated in non-equilibrium systems.

Existing CW SRF systems have directly demonstrated BBU stability at only a fraction of the multi-pass in-linac current needed, although CBETA has this as a primary goal [35]. Heating from collective effects, such as THz emission, resistive wall losses, and RF heating has proven problematic in legacy systems [36] and will have greater impact at higher energy and current. No systems now in operation or under construction provide a platform for testing in a multipass architecture.


There have been few demonstrations of ERL operation in which the full-energy “virtual” beam power exceeded installed RF drive, and none of these involved multiple passes and/or fully common transport for acceleration and recovery. Large system designs rely on both, despite operational experience indicating heightened risk and degree of difficulty. The impact of increased “dynamic range” (the ratio of full to injected beam energy) is poorly characterized. In ERLs error sensitivity increases when perturbations at high energy are adiabatically anti-damped on deceleration.

STAGED UK-XFEL SYSTEM PROPOSAL

There is an ambition to build an XFEL in the UK in the coming decade [2]. Specifications are still evolving, however many are not compatible with normal conducting linac technology e.g. user requests have included >100 kHz repetition rate ~10 keV pulses with laser / XFEL synchronisation less than 1 fs. Superconducting linac technology is therefore explored as an option. To

The first consideration in design of an N-pass recirculating system (whether or not ER is implemented) is the choice of topology. This is because unlike rings and single pass linacs, there is additional freedom in the basic layout of the accelerator. An obvious choice would seem to be symmetrically bisected linac, such as the layout of CEBAF. If this is chosen, there is still freedom whether to inject the spent beam for recovery into the first or second accelerating linac. Choosing to inject into linac-2 is preferable as this then separates the accelerating and decelerating beams in energy at all locations, allowing independent control of the phase spaces from pass to pass (unfortunately not possible in the proposed ER@CEBAF experiment [38] where we must transport both accelerating and decelerating passes in the same beam line leading to multiple restrictions on operation). An asymmetrically-bisected linac [23], although less efficient in terms of tunnel packing fraction, is superior optically as it mitigates the low beam energy constrained focusing. Another alternative is to symmetrize an asymmetrically bisected linac. This is achieved by splitting it into one half-linac on one side of a racetrack and two quarter-linacs on the other side, all injection / extraction are then placed between the two quarters. This has all the advantages of the asymmetric topology, but retains the original tunnel packing fraction and symmetrizes all optics in the spreader / recombiner sections, simplifying the design.

Picking a topology, an energy and tolerable peak current and slice energy spread sets the arc size required and therefore the cost of the facility. Initial cost estimates are that for an 8 GeV machine, the optimum lies at 3-passes with a saving of $\sim 35\%$ over a single-pass linac. An additional 10% investment would enable ER in a 3-up / 3-down configuration, leading to a final facility capable of 100 MHz repetition rate that is cheaper than a single linac (which is only capable of ~ 1 MHz rep. rate) by $\sim 25\%$.

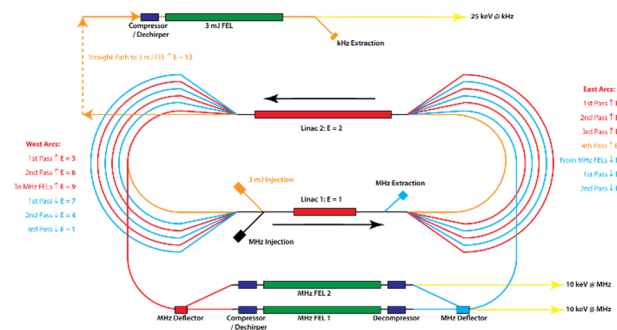

CONCLUSIONS

REFERENCES

- ## 02 Photon Sources and Electron Accelerators
- ### A05 Synchrotron Radiation Facilities

- [3] M. Tigner, "A Possible Apparatus for Electron Clashing-Beam Experiments", *Nuovo Cimento*, vol. 37, pp. 1228-1231, 1965.
- [4] K. Brown, "A Method of Doubling or Tripling the Output Energy of a Linear Accelerator", SLAC, Menlo Park, CA, Report 63-8, Jan. 1963.
- [5] W. Herrmannsfeldt, "A Recirculating Beam in a Cryogenic SLAC", SLAC, Menlo Park, CA, Report 68-8, Mar. 1968.
- [6] D. Douglas, *et al.*, "Use of Multipass Recirculation and Energy Recovery in CW SRF X-FEL Driver Accelerators", in *Proc. FEL'10*, Malmo, Sweden, Aug. 2010, paper TUOA4, pp. 193-196.
- [7] C. Tennant and D. Douglas, "Design Concept for a Compact ERL to Drive a VUV/Soft X-Ray FEL", in *Proc. PAC'11*, New York, NY, Mar.-Apr. 2011, paper THP187, pp. 2468-2470.
- [8] P. Williams *et al.*, "Recirculating Linac Free-Electron Laser Driver", *Phys. Rev. ST Accel. Beams*, vol. 14, 050704, May 2011.
- [9] R. York, "5 Upgradable to 25 keV Free Electron Laser Facility", *Phys. Rev. ST Accel. Beams*, vol. 17, 010705, Jan. 2014.
- [10] A. Bartnik *et al.*, "Operational Experience with Nanocoulomb Bunch Charges in the Cornell Photoinjector", *Phys. Rev. ST Accel. Beams*, vol. 18, 083041, 2015.
- [11] P. Piot *et al.*, "Longitudinal Phase Space Manipulation in Energy Recovering Linac-Driven Free-Electron Lasers", *Phys. Rev. ST Accel. Beams*, vol. 6, 030702, 2003.
- [12] C.-Y. Tsai *et al.*, "Linear Microbunching Analysis for Recirculation Machines", *Phys. Rev. Accel. Beams*, vol. 19, 114401, 2016.
- [13] C.-Y. Tsai *et al.*, "Conditions for Coherent-Synchrotron-Radiation-Induced Microbunching Suppression in Multi-bend Beam Transport or Recirculation Arcs", *Phys. Rev. Accel. Beams*, vol. 20, 024401, 2017.
- [14] T. Charles *et al.*, "Applications of Caustic Methods to Longitudinal Phase Space Manipulation", presented at the 9th Int. Particle Accelerator Conf. (IPAC'18), Vancouver, Canada, Apr.-May 2018, paper WEYGBE2.
- [15] T. Powers and C. Tennant, "Implications of Incomplete Energy Recovery In SRF-Based Energy Recovery Linacs", in *Proc. ERL'07*, Daresbury, UK, May 2007, pp. 75-79.
- [16] E. Vogel *et al.*, "Test and Commissioning of the Third Harmonic RF System for FLASH", in *Proc. IPAC'10*, Kyoto, Japan, May 2010, paper THPD003, pp. 4281-4283.
- [17] F. Jackson *et al.*, "Longitudinal Transport Measurements in an Energy Recovery Accelerator with Triple Bend Achromat arcs", *Phys. Rev. Accel. Beams*, vol. 19, 120701, 2016.
- [18] C. Tennant *et al.*, "Experimental Investigation of Multibunch, Multipass Beam Breakup in the Jefferson Laboratory Free Electron Laser Upgrade Driver", *Phys. Rev. ST Accel. Beams*, vol. 9, 064403, 2006.
- [19] F. Marhauser, "Next Generation HOM-damping", *Supercond. Sci. Technol.*, vol. 30, 063002, 2017.
- [20] R. Rimmer *et al.*, "Recent Progress on High-Current SRF Cavities at JLab", in *Proc. IPAC'10*, Kyoto, Japan, May 2010, paper WEPEC076, pp. 3052-3054.
- [21] T. Powers, "Optimization of SRF Linacs", in *Proc. SRF'13*, Paris, France, Sep. 2013, paper THIOA05, pp. 830-835.
- [22] C. Hernandez-Garcia *et al.*, "Longitudinal Space Charge Effects in the JLab IR FEL SRF Linac", in *Proc. FEL'04*, Trieste, Italy, Aug.-Sep. 2004, paper TUBOS02, pp. 363-366.
- [23] D. Douglas, "A Generic Energy-Recovered Bisected Asymmetric Linac (GERBAL)" *ICFA Beam Dynamics Newsletter* 26, 2001.
- [24] D. Douglas, "Optics of Beam Recirculation in the CEBAF CW Linac", in *Proc. LINAC'86*, Menlo Park, CA, Jun. 1986, paper TH3-8, pp. 449-451.
- [25] S. Di Mitri *et al.*, "Cancellation of Coherent Synchrotron Radiation Kicks with Optics Balance", *Phys. Rev. Lett.*, vol. 110, 014801, Jan. 2013.
- [26] D. Douglas *et al.*, "Control of Coherent Synchrotron Radiation and Microbunching During Transport of High Brightness Electron Beams", Jefferson Lab, Newport News, VA, Report JLAB-ACP-14-1751, Mar. 2014, arXiv:1403.2318.
- [27] D. Douglas *et al.*, "Control of Synchrotron Radiation Effects During Recirculation", in *Proc. IPAC'15*, Richmond, VA, May 2015, paper TUPMA035, pp. 1913-1915.
- [28] Y. Jing *et al.*, "Compensating Effect of the Coherent Synchrotron Radiation in Bunch Compressors", *Phys. Rev. ST Accel. Beams*, vol. 16, 060704, 2013.
- [29] J. Akkermans *et al.*, "Compact Compressive Arc and Beam Switchyard for Energy Recovery Linac-driven Ultraviolet Free Electron Lasers", *Phys. Rev. Accel. Beams*, vol. 20, 080705, 2017.
- [30] D. Douglas *et al.*, "Control of Synchrotron Radiation Effects during Recirculation with Bunch Compression", in *Proc. IPAC'15*, Richmond, VA, May 2015, paper TUPMA034, pp. 1910-1912.
- [31] D. Douglas and C. Tennant, "Method and Apparatus for Recirculation with Control of Synchrotron Radiation", U.S. Patent No. 9,408,290, Aug. 2, 2016.
- [32] C. Tennant, "Energy Recovery Linacs" in *Challenges and Goals for Accelerators in the XXI Century*, O. Burning and S. Meyers, Eds., Singapore, World Scientific, 2016.
- [33] D. Douglas, *et al.*, "Why PERLE: Historical Context and Technological Motivation", Jefferson Lab, Newport News, VA, Report 18-014, March 2018.
- [34] R. Alarcon *et al.*, "Transmission of Megawatt Relativistic Electron Beams Through Millimeter Apertures", *Phys. Rev. Lett.*, vol. 111, 164801, Oct. 2013.
- [35] G. Hoffstaetter *et al.*, "CBETA Design Report, Cornell-BNL ERL Test Accelerator", arXiv:1706.04245.
- [36] S. Benson *et al.*, "High Power Operation of the JLab IR FEL Driver Accelerator", in *Proc. PAC'07*, Albuquerque, NM, Jun. 2007, paper MOOAAB03, pp. 79-81.
- [37] R. Hajima and M. Fujiwara, "Narrow-band GeV Photons Generated from an X-ray Free-electron Laser Oscillator", *Phys. Rev. Accel. Beams* 19, 020702, 2016.
- [38] A. Bogacz, *et al.*, "ER@CEBAF: A Test of 5-pass Energy Recovery at CEBAF", Brookhaven National Lab, Upton, NY, Report BNL-112411-2016-IR, 2016.